

## CATV/SAT Splitters

### N210X Series CATV Splitters(5~1000MHz)

#### FEATURES


- Zinc die cast housing, nickel plated.
- All ports are F-(f) connectors, 75 ohm.
- Grounding terminal provided.
- Light weight and compact size.
- Two pieces of screws attached.
- Screening factor:
  - 30-300MHz ≥85dB
  - 300-470MHz ≥80dB
  - 470-1000MHz ≥75dB



N2102



N2103

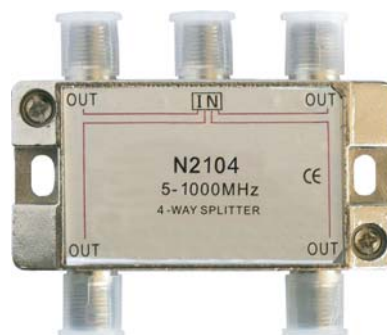

N2104

*\*6-way and 8-way products are also available.*

#### SPECIFICATIONS

Item	Frequency	N2102	N2103	N2104	N2106	N2108
Insertion Loss IN-OUT (max. dB)	5-40MHz	3.5	5.5	7.0	8.6	10.5
	40-470MHz	3.6	5.8	7.2	9.0	11.0
	470-750Mhz	3.8	6.0	7.5	9.8	12.0
	750-860Mhz	4.0	6.4	7.9	10.2	12.2
	860-1000MHz	4.2	6.7	8.5	10.7	12.5
Mutual Isolation OUT-IN (min. dB)	5-40MHz	32	30	30	28	27
	40-470MHz	30	28	28	27	26
	470-750Mhz	30	28	28	26	26
	750-860Mhz	30	28	28	26	25
	860-1000MHz	28	26	26	25	25
Return Loss IN/OUT (min. dB)	5-40MHz	22	22	22	19	19
	40-470MHz	22	20	20	20	20
	470-750Mhz	20	20	20	20	20
	750-860Mhz	20	18	18	18	18
	860-1000MHz	20	18	18	17	17